

4" Spiral Wound Nanofiltration Elements

Description: Low Pressure, High Productivity:
Low pressure application for nanofiltration


Specifications:

Model	Permeate Flow GPD(m ³ /day)	Active Membrane Area ft ² (m ²)	Stabilized Salt Rejection	Minimum Salt Rejection	Feed spacer mil(mm)	Test Conditions
NF-4040	2850 (11)	90 (8.4)	98%	97%	28 (0.7)	70psi/2000ppm MgSO ₄
	3300 (12)		40~60%	40~60%		70psi/500ppm CaCl ₂

1. All performance data are collected at 25°C (77°F), pH7.5 and 15% recovery rate.
2. Permeate flows for single element may vary ±15%.

Element Dimension:

* Unit: Inch (mm)
1 inch= 25.4 mm

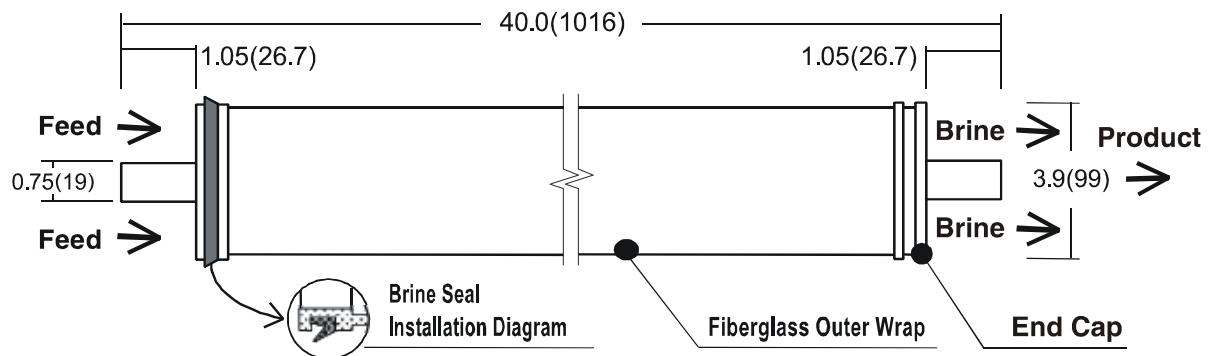

**Operating Limits
for Design:**

Maximum Operating Temperature.....	45°C(113°F)
Maximum Operating Pressure.....	600psi(41bar)
Maximum Pressure Drop (single element).....	15psi(1.0bar)
pH Range for Continuous Operation.....	3-10
pH Range for Cleaning.....	2-11
Chlorine tolerance.....	<0.1ppm
Maximum Feed SDI.....	5

